




technical drawing

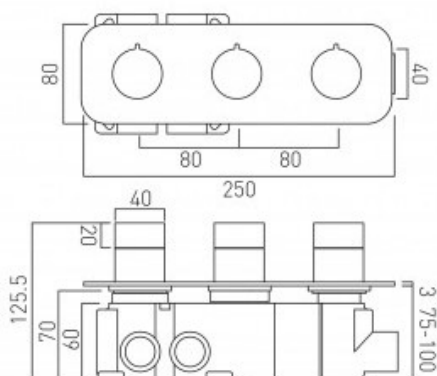

description:

tablet altitude horizontal concealed 3 outlet, 3 handle thermostatic shower valve with all-flow function wall mounted with horizontal rectangular backplate thermostatic cartridge V-001C-PLA diverter cartridge F-401-DIV 2 x 3/4" female inlets 2 x 3/4" female outlets includes fittings for 1/2" and 3/4" pipework minimum operating pressure 0.2 bar LP (shower) 1.0 bar MP (bath) min-max wall mount 75-100mm (standard) optimum installation depth 88mm (standard)

finishes:

chrome

minimum operating pressure: 0.2 bar LP (shower), 1.0 bar MP (bath)

guarantee:

12 year guarantee