

clearwater



Unlimited water

Smaller than a crate of 6 water bottles, it dispenses up to 15 litres per hour of cold water - between 3° and 10° C -



Under-counter solution

Small and discreet, Pure100 can be installed under the kitchen sink, leaving worktops clear.



Cutting - edge technology






Ice-bank cooling technology offers optimum performance within a compact space.




Filtration

Optional filters enhance the taste and quality of the water. In addition to the traditional filter system used to remove unpleasant odors and tastes, antibacterial filters and descalers may also be fitted.

clearwater

					Assorbimento Rated Input
Pure 100					155 W

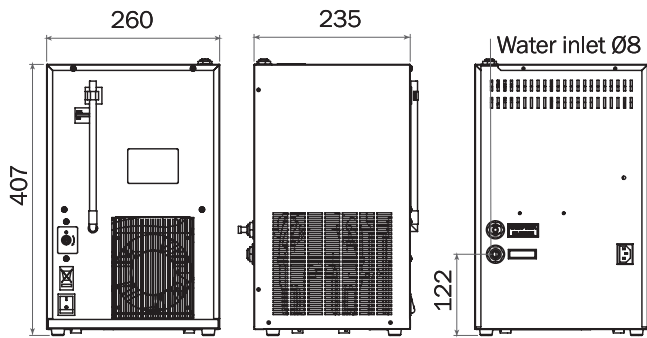

Technical features	
Dimensions	See drawings
Cooling performance	15 lt/h; 3 lt continuously
Dispensed cold water temperature	3-10°C with 20°C incoming water and 25°C room temperature
Heating performance	13 lt/h; 0,8 lt continuously
Dispensing	40 sec. / lt liscia; 35 sec. / lt gassata (con 3 bar di pressione in ingresso) 40 sec. / lt for natural water; 35 sec. / lt for sparkling (with 3 bar of incoming water pressure)
Condensation	Ventilated blowing
Thermostat	Mechanical
Compressor	1/12 HP
Ice bank	2 lt capacity, 1 Kg of ice
Inlets/outlets	Water inlet Ø 8 mm, water outlets Ø 6 mm, includes 1/4" adaptors



Max. quantity for pallet 18 / 24

Pallet dim. (WxDxH)
120x80x160