




technical drawing

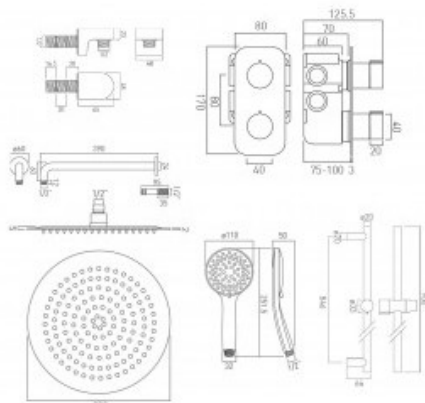

description:

tablet altitude vertical
 • 2 outlet, 2 handle valve with all-flow function
 • aquablade 300mm round head with shower arm
 • atmosphere slide rail shower kit with air-injection
 single-function handset
 • life wall outlet
 minimum operating pressure 0.2 bar LP

kit comprises:
 TAB-148/2-ALT-C/P
 AQB-RO/30/SA/A-C/P
 ATM-SFSRK/2-C/P
 LIF-OUTLET-C/P

shower valve includes fittings for 1/2" and 3/4" pipework
 min-max wall mount 75-100mm (standard)
 optimum installation depth 88mm (standard)

finishes:

chrome

minimum operating pressure: 0.2 bar LP

ECO flow regulator: FR-SHOWER/9-C/P (2 are required)

guarantee:

12 year guarantee