

Assembly Instruction


Easy Installation

D.I.Y

WARNING! PLEASE PLACE ALL THE PRODUCTS AT ROOM TEMPERATURE AND DO NOT STORAGE THE BIDETS AND ITS ACCESSORIES IN THE FREEZING TEMPERATURE ENVIORNMENTS UNDER 0 DEGREE CELCIUS!

1. NAMES AND FUNCTIONS OF PARTS

Parts

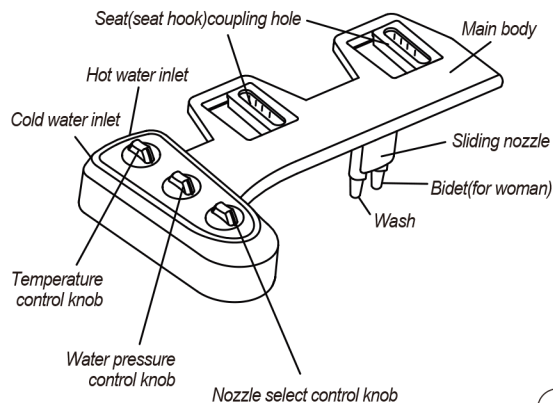

Installation Tools Needed




2. INSTALLATION


PREPARATION

- A. Remove the existing toilet seat.
C.Flush toilet to drain tank completely.


- B. Turn off the water valve.
D. Take out exiting water pipe.



A. Bidet Assembly

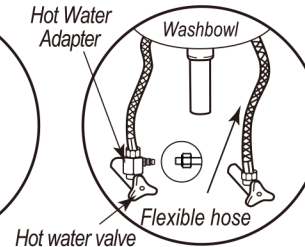

B. Hot Water Installation

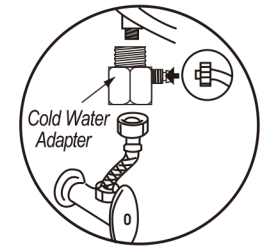


C. Cold Water Installation



HELPFUL TIP:

Over tightening flexible hoses adaptor can cause damage to the threads and result in water leakage. Use only hand pressure first and check for any leakage. Turn only less than quarter turn at a time making sure there is no leakage.

3. FINAL ASSEMBLED FIGURE

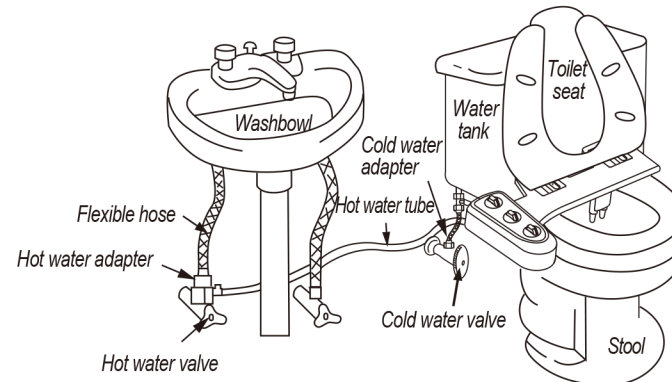


TRYING FOR THE FIRST TIME

Congratulations! You are ready to use for the first time. Be sure to turn water pressure control knob gently until reaching your desired pressure. Water pressure control device is only to control water pressure , not for setting up the duration of water spray.

TROUBLE SHOOTING

Twin Nozzle System



If your spray outlet hole is clogged for some reason, simply try to move spray outlet up and down for a few times manually.